

Supporting information for

Intelligent Detection of Void Fraction of Annular Two-Phase Flow Regime Using Energy Characteristic Obtained from Image Tomography

Mohammad Reza Emamian,¹ Mohammad Hossein Shahsavari,¹ Seyed Mehdi Alizadeh,² Umer Hameed Shah^{3,*} and Gholam Hossein Roshani^{1,*}

¹Electrical Engineering Department, Kermanshah University of Technology, Kermanshah, 6715685420, Iran

²Petroleum Engineering Department, Australian University, West Mishref, 13015, Kuwait

³Department of Mechanical Engineering and Artificial Intelligence Research Center, College of Engineering and Information Technology, Ajman University, Ajman, PO Box 346, United Arab Emirates

*Email: m.shah@ajman.ac.ae (Umer Hameed Shah),
hosseinroshani@kut.ac.ir (Gholam Hossein Roshani)

DOI: <https://dx.doi.org/10.30919/es1910>

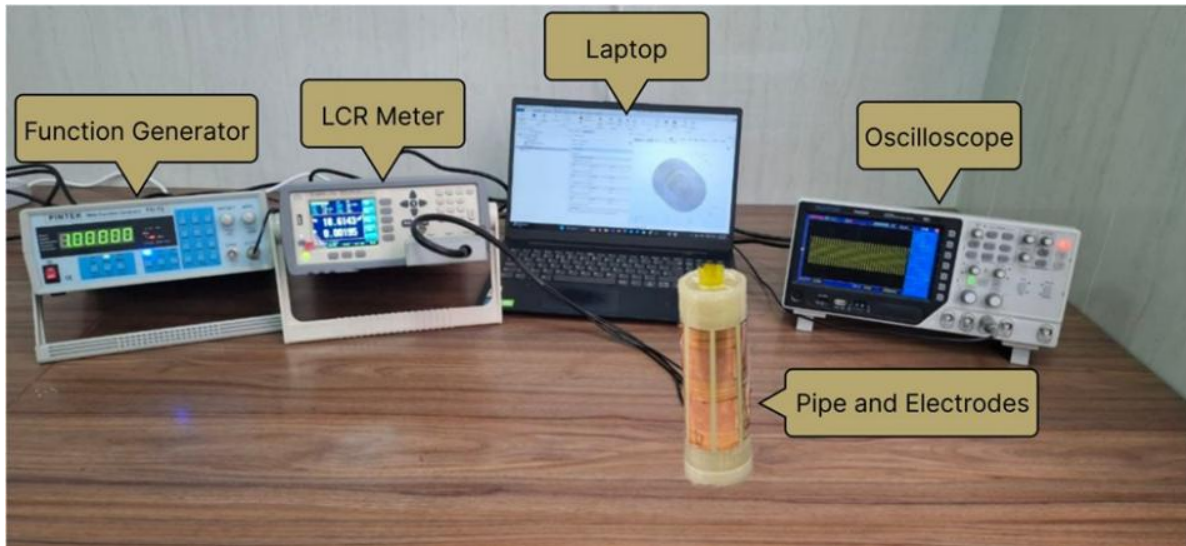


Fig. S1: The experimental setup designed to measure the capacitance values of an 8-blade concave sensor.

Publisher's Note: Engineered Science Publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Open Access

This article is licensed under a Creative Commons Attribution 4.0 International License, which permits the use, sharing, adaptation, distribution and reproduction in any medium or format, as long as appropriate credit to the original author(s) and the source is given by providing a link to the Creative Commons license and changes need to be indicated if there are any. The images or other third-party material in this article are included in the article's Creative Commons license, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons license and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>.

©The Author(s) 2025.